



L90 RIGHT ANGLE ELED TORCH

Light, small and easy to operate, L.90 incorporates Adaro's famous LED-Engine optics which includes 2 LEDs (spot, flood and step light options).

It is compatible with most structural and wildland fire ensembles and Certified ATEX zone 0 for use in explosive atmospheres.

Available with replaceable or rechargeable batteries. Model with rechargeable batteries requires CL90.1 (i) charging station.

A. CONTROLS: Oversized, soft touch power button. Backlit button acts as battery level indicator.

B. BODY: Impact resistant and anti-static thermoplastic resin.


C. STEP LIGHTING SYSTEM, two side LED's project light downward about 3m ahead of the user to illuminate the ground.

D. RING & SPRING CLIP.

E. ATEX INTRINSIC SAFETY: II 1G Ex ia op is IIC T4 Ga.

F. INGRESS PROTECTION: IP67, protection against dust ingress (dust tight) and short periods of immersion in water up to 1m (not pictured).

G. MADE IN SPAIN.

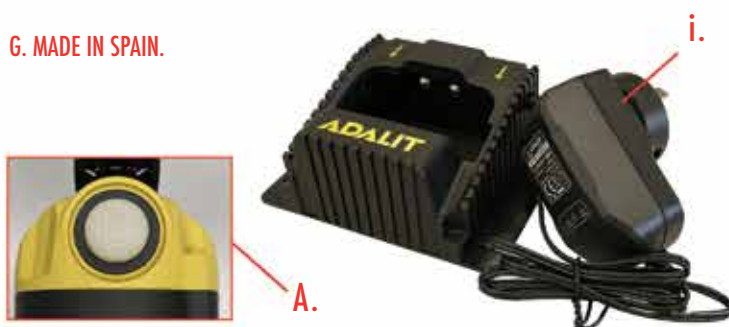

PRODUCT CODE	L.90	L.90R	L.90P	L.90RP
DESCRIPTION	Adalit L90	Adalit L90 Rechargeable	Adalit L90 Power	Adalit L90 Power Rechargeable
BATTERY	Replaceable 3 x AA Alkaline batteries	Rechargeable 3.7v Li-ion battery	Replaceable 3 x AA Alkaline batteries	Rechargeable 3.7v Li-ion battery
BURN	Up to 20 hours	Up to 18 hours	Up to 20 hours	Up to 18 hours
LIGHT OUTPUT	250lm	280lm	300lm	340lm
BEAM DISTANCE	220m	235m	255m	265m
OPTICS	Booster Function Illuminates long distances with greater penetrating light beam	Booster Function Illuminates long distances with greater penetrating light beam	Power LED-Engine Spot, flood and stroboscopic beam settings	Power LED-Engine Spot, flood and stroboscopic beam settings